


PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

OSCA Remote Control-8

8-Way OSC Advanced Programmable Button Box with TFT Screen

USER GUIDE




PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

Overview


The OSCA Remote Control-8 is a next generation multiple command destination show control solution featuring OSC Network input, POE IEEE 802.3 or 5v DC powering, eight independent momentary push buttons, and a 480x320 pixel TFT display.

Top Panel

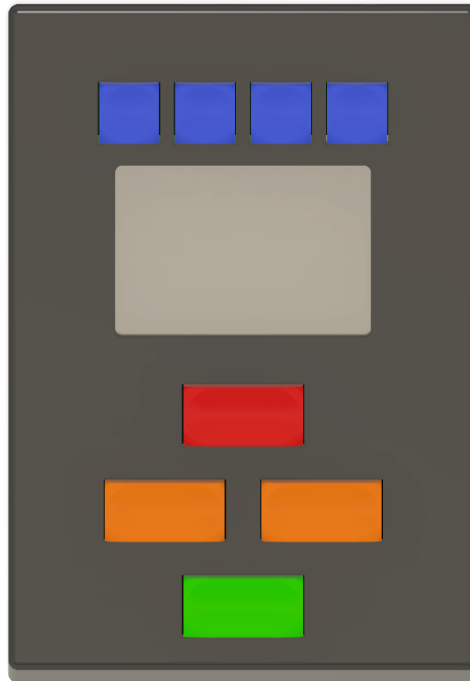

Buttons – The Remote Control-8 features 8 momentary push buttons and a 480x320 pixel TFT screen.


Rear Panel Connections

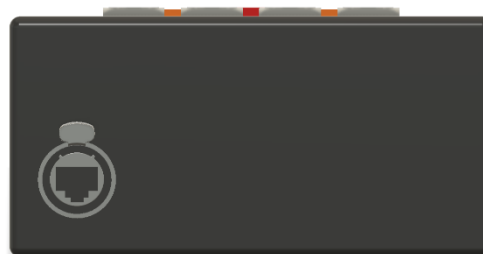

Power & Network – OSCA can be powered by POE IEEE 802.3 or 5v DC via the USB C port

Settings


The Remote Control-8 can operate in 1 of 5 modes. The settings on this page depend on the mode of operation.



PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

Button	Action
QLab	Buttons 1-4 operate independently and can be used to send OSC messages. Buttons 5-8 send playhead controls to a specific cue list within QLab. The TFT screen will automatically update with the cue name of the playhead position when a button is pressed. For example, this mode can be used for a musician to control a cue list of click tracks independently from other cue lists within the workspace.
QLab (Advanced)	As QLab mode, but access is given to buttons 5-8 to allow additions or changes to the auto generated messages.
OSC	The OSCA Remote Control-8 runs its own cue list and sends an OSC message each time button 5 is pushed. The cue number can be embedded into the OSC message sent. This mode can be used to control OSC compatible devices that don't have a built-in cue list or to control an OSC compatible device remotely.
Midi	For future expansion, similar to OSC mode, but sending MIDI rather than OSC messages.
Manual	All 8 buttons send OSC messages independently. TFT screen can be updated via OSC methods.



PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

QLab

IP: 192.168.4.222
Device: OSCA-RC8
Connected

Remote Control 8
Remote Control 8 Mode: QLab
TFT Brightness: 100 %

Button Leds
LED Brightness: 78 %

Button LED Colours:


Button 1 Blue	Button 2 Blue	Button 3 Blue	Button 4 Blue
Button 5 Green	Button 6 Yellow	Button 7 Yellow	Button 8 Red

QLab
QLab cue list name: Click Track Cue List
QLab cue list id: 41C90B6B-58FD-4200-80CF-CBF61A549CEE
Sync Refresh
Display Mode: Show Next Cue
Playhead Override:
Refresh QLab playhead position on bootup:
Auto refresh QLab playhead position: Off
Save
Config Backup
Download config.json
Config Restore
Choose file No file chosen Upload

Device: OSCA-RC8
MAC: E8:9F:6D:D0:ED:8B
IP: 192.168.4.222
Code Version: OSCA-RC8.0.0.10.2
HTML Version: 20230519
NOT RELEASE CODE - Compiled in debug Mode

To use the Remote Control-8 to control a QLab cue list, follow the steps below.

1. Set up QLab to allow OSC connections, with no password access for control. For further details see <https://qlab.app/docs/v5/fundamentals/workspace-settings/#the-osc-access-tab>
2. Ensure that Remote Control-8 and QLab are on the same network with suitable IP addresses and subnets
3. In the Destinations Tab of the Remote Control-8, set the IP address of the QLab system(s) you wish to control in Destination 1 and Destination 2
4. In QLab highlight any cue in the cue list you wish to control
5. In the Settings Tab of the Remote Control-8 click the sync button. If successful, this will populate the name and GUID of the QLab cue list in the section.
6. Click Save to store these settings.



PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

The GUID of a QLab cue list is constant for a particular file, irrespective of computer running the file, so this process will usually only need to be done when first setting up a performance.

Buttons 5 - 8 on the device will now act as Go, Previous, Next, Stop for the configured QLab cue list. The TFT screen will update with the name of the playhead position when any of these buttons are pressed, by querying the QLab system specified as Destination 1. Details of the commands can be found later in this section. These commands respect the current playhead position, which may have been moved by the QLab operator since the TFT screen was updated.

Remote Control-8 will query Destination 1 for cue names and GUIDs by default. Send the message `/qlabdatasource [Destination number]` to the device with a new destination number to amend this until the device is rebooted.

The current QLab data source is shown in the QLab status indicator on the TFT screen.



QLab status indicator can show the following states:

Green	QLab replied with status OK
Red	No reply from QLab received
Yellow	QLab replied with status Error
Orange	QLab replied with status Denied. This is usually due to a passcode set for OSC access. QLab 5 only.
Black	Unknown OSC reply received.

Sending the message `/refresh` to the device will cause it to query QLab for the current playhead position and update the TFT screen. This can also be done by clicking the refresh button on the settings page.

With Playhead Override switched on, the device will send an additional locate message before sending Go, Previous, Next, Stop command. This will force QLab to respect the cue shown on the OSCA Remote Control-8 TFT screen, irrespective of its playhead position in QLab.


QLab (Advanced)

As QLab mode above, but buttons 5-8 are made available in the buttons setting page. Some messages are preconfigured by OSCA device as described in the tables below. Additional messages may be added, or the generated messages amended, for example to amend button 8 to fire a specific stop cue rather than panic the cue list. The messages below should not usually be changed.

Playhead Override Off

Message 1	Go/Stop/Previous/Next to QLab 1 (Destination 1)
Message 2	Go/Stop/Previous/Next to QLab 2 (Destination 2)
Message 3	Get cue name from updated playhead position (Destination 1)

Messages are generated when Sync button clicked on settings page



PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

Playhead Override On

Message 1	Set playhead position to match TFT screen QLab 1 (Destination 1)
Message 2	Set playhead position to match TFT screen QLab 2 (Destination 2)
Message 3	Go/Stop/Previous/Next to QLab 1 (Destination 1)
Message 4	Go/Stop/Previous/Next to QLab 2 (Destination 2)
Message 5	Get cue name from updated playhead position (Destination 1)

Messages are generated when Sync button clicked on settings page, messages 1 & 2 updated with each button push.

Message details

Messages shown for a sample GUID and for destination 1 only.

QLab version 4 responds to playheadId rather than playheadID, OSCA Remote Control-8 will adjust the messages as necessary based on the version detected when syncing.


Playhead Override Off

Go	/cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/go /cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playheadID
Previous	/cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playhead/previous /cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playheadID
Next	/cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playhead/next /cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playheadID
Stop	/cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/panic /cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playheadID

Playhead Override On

Messages will addresses specific cues, and the GUIDs are updated with each button push.

Go	/cue_id/ A37B85FC-93EF-4AFD-A882-BDA09FE4638E/go /cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playheadID
Previous	/cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playheadID A37B85FC-93EF-4AFD-A882-BDA09FE4638E /cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playhead/previous /cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playheadID
Next	/cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playheadID A37B85FC-93EF-4AFD-A882-BDA09FE4638E /cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playhead/next /cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playheadID
Stop	/cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/panic /cue_id/437EDDE0-591C-4D02-9F7B-F2F20CC8C434/playheadID



PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

OSC

IP: 192.168.4.222
 Device: OSCA-RC8
● Connected

NETWORK
DESTINATIONS
BUTTONS
SETTINGS
FIRMWARE UPGRADE

Remote Control 8

Remote Control 8 Mode: OSC

TFT Brightness: 100 %

Button Leds

LED Brightness: 78 %

Button 1
Blue

Button 2
Blue

Button 3
Blue

Button 4
Blue

Button 5
Green

Button 6
Yellow

Button 7
Yellow

Button 8
Red

OSC

Go Command: (enter an OSC address followed by 0,1 or 2 arguments separated by spaces. Use #OSCA# to insert the cue number into the command in the format selected)

Address: Arguments:

OSC Argument Type: Integer

Stop Command:

Address: Arguments:

Cue List

Start Number: ✎ Mass Entry

Cue Number	Cue Name	
100	<input style="width: 90%;" type="text" value="Cue Name for Cue 100"/>	✕ Delete
101	<input style="width: 90%;" type="text" value="Cue Name for Cue 101"/>	✕ Delete
102	<input style="width: 90%;" type="text" value="Cue Name for Cue 102"/>	✕ Delete
103	<input style="width: 90%;" type="text" value="Cue Name for Cue 103"/>	✕ Delete
104	<input style="width: 90%;" type="text" value="Cue Name for Cue 104"/>	✕ Delete

+ New Cue

For the changes to take effect, please click 'Save'. OSCA will not respond to OSC or GPI changes whilst saving.

Save

Config Backup

⬇ Download config.json


Config Restore

Choose file No file chosen ⬆ Upload

Device: OSCA-RC8
 MAC: E8:9F:6D:D0:ED:8B
 IP: 192.168.4.222

Code Version: OSCA-RC8.0.0.10.2
 HTML Version: 20230519
 NOT RELEASE CODE - Compiled in debug Mode

OSC mode is designed to send incrementing OSC messages to an OSC compatible device, with OSCA Remote Control-8 running its own internal cue list. In this mode, only Buttons 5 and 8 send OSC messages, Buttons 6 & 7 will move up and down the internal cue list.



PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

Button 8 will always send the same message determined by the Stop Command

Button 5 will send the message specified by the Go command. It is possible to insert the internal cue list Cue Number into the OSC message, either as part of the address, or as a String/Integer/Float argument.

In the example above,

1. at boot up, device will show "Cue Name for Cue 100" on the TFT screen.
2. On pressing Button 5, the device will send the address `/fire/example/cue` with an integer argument of 100
3. The TFT screen will update to show "Cue Name for Cue 101"
4. On pressing Button 5, the Remote Control-8 will send the address `/fire/example/cue` with an integer argument of 101
5. This will continue down the cue list.

Cue list cue number are incremental, specify the first cue number in Start Number

Click mass entry to paste in a list of Cue Names from a text file or spreadsheet.

OSCA Remote Control-8 is limited to a maximum of 50 cues.


Midi

To be developed in a future firmware release.

Manual

In Manual mode, button and TFT screen brightness can be controlled. All other settings are specified on the other menu tabs.

TFT screen will remain blank unless set by the OSC methods listed later in this manual.



PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

The screenshot shows the 'SETTINGS' page of the NEMESIS RESEARCH interface. At the top right, it displays 'IP: 192.168.4.222', 'Device: OSCA-RC8', and a 'Connected' status with a green indicator. The navigation menu includes NETWORK, DESTINATIONS, BUTTONS, SETTINGS (selected), and FIRMWARE UPGRADE. The main content area is titled 'Remote Control 8' and features a 'Remote Control 8 Mode' dropdown set to 'Manual' and a 'TFT Brightness' slider at 100%. Below this is the 'Button Leds' section with an 'LED Brightness' slider at 78%. There are eight 'Button LED Colours' controls, each with a dropdown menu and a color indicator: Button 1 (Blue), Button 2 (Blue), Button 3 (Blue), Button 4 (Blue), Button 5 (Green), Button 6 (Yellow), Button 7 (Yellow), and Button 8 (Red). A 'Save' button is located below the LED controls. Further down, there are 'Config Backup' and 'Config Restore' sections. The 'Config Backup' section has a 'Download config.json' button with a checkmark icon. The 'Config Restore' section has a file selection area with 'Choose file', 'No file chosen', and an 'Upload' button with an upload icon. At the bottom of the interface, device information is shown: 'Device: OSCA-RC8', 'MAC: E8:9F:6D:D0:ED:8B', 'IP: 192.168.4.222', 'Code Version: OSCA-RC8.0.0.10.2', 'HTML Version: 20230519', and 'NOT RELEASE CODE - Compiled in debug Mode'.

Network Settings

Default IP settings


IP Address	192.168.1.253
Subnet Mask	255.255.255.0
Gateway	192.168.1.1
DNS Main	192.168.1.1
DNS Backup	192.168.1.1
Network Device Name	OSCA-RC8
OSC Listen Port	53500

In order to change settings, navigate to the device's IP address (default: 192.168.1.253) on the network using a web browser or use its network name (default: OSCA-RC8 and navigate to the "Network page"

In order for changes to take effect press save and then restart (Please note if you have changed IP address or device name the page may not refresh, and you will need to open a new tab in your browser with the new user settings).

Destination Settings


On the Destinations page, you can specify and name destinations (a maximum of 6) which will be stored in the device's memory. Please specify the IP address and OSC listen to port of the receiving device(s).



PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

Button Settings

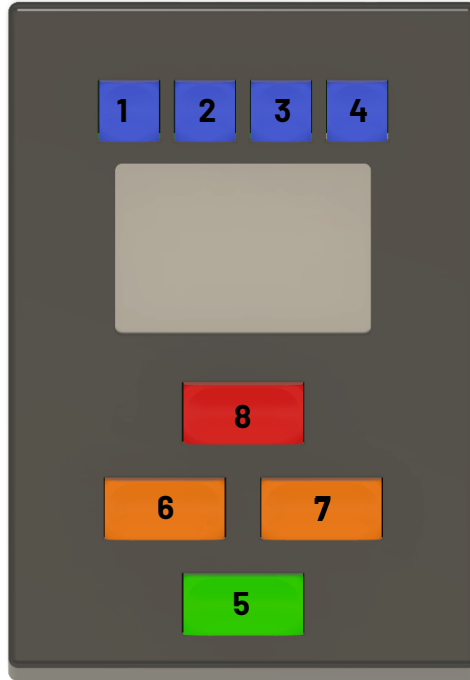

IP: 192.168.4.222
Device: OSCA-RC8
Connected

NEMESIS RESEARCH NETWORK DESTINATIONS **BUTTONS** SETTINGS FIRMWARE UPGRADE

Inputs

INPUT 1
 INPUT 2
 INPUT 3
 INPUT 4

Debounce: (default 250ms)
 Polarity:

Message 1

Description: (give each message a human readable description)


Command: (enter an OSC address followed by 0,1 or 2 arguments separated by spaces. Arguments can be in quotes to make them strings)

Address: Arguments:

Destination:

Device: OSCA-RC8
 MAC: E8:9F:6D:D0:ED:8B
 IP: 192.168.4.222

Code Version: OSCA-RC8.0.0.10.3
 HTML Version: 20230519
 NOT RELEASE CODE - Compiled in debug Mode



PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

Buttons 1-4 can send up to six messages (commands), with each one sent to one of six destinations. (to send the same command to multiple destinations send identical command to each location)

Buttons 5-8 have special function as described in the section for each mode unless in Manual mode where buttons 5-8 can be programmed in the same way as buttons 1-4.

Specify the message(s) for each input and configure polarity and debounce. The status of each input can be seen on the tabs, and the configured messages can be sent by clicking the Test button.

OSCA has a maximum command length of 192 characters.

You can then select which destination you would like this command to be sent to. Each input can send up to 4 commands, with each command being sent to one destination (To send the same command to 2 destinations send identical commands to each receiving device).

A debounce time can be set per input in milliseconds. This is the time after the input is released before it can be pressed again (the default is 250ms).

The indicators show whether an input is currently active or not (green active, red inactive). An X on the indicator will show if an input is configured to activate on release.

Firmware Upgrade

If connected to the internet you can use the Firmware Upgrade page to install the latest firmware from the Nemesis server.

OSC methods (incoming OSC)

OSCA will react to incoming OSC messages on the port specified. In some instances, it can be useful to configure a button on OSCA Remote Control-8 to send itself an OSC message e.g. /refresh. This can be done by using 127.0.0.1 as the IP address of a destination and matching the port numbers.

`/button/[button number]`

e.g. `/button/1`

Will send the commands specified by button 1 as if button 1 had been pressed.

`/input/[button number]`

e.g. `/input/1`

Will send the commands specified by button 1 as if button 1 had been pressed.

`/qlabdatasource [destination number]`

e.g. `/qlabdatasource 1`

When in QLab or QLab (Advanced) mode with specify which destination number to use to query QLab for cue names. This will revert to destination 1 when OSCA Remote Control-8 is restarted.

`/tft/printlarge/[first line]/[last line]`


e.g. `/tft/printlarge/1/2 "Hello World!"`

Print the string argument on the TFT screen starting at line 1 and ending on line 2. The TFT has 5 lines of large text.

`/tft/printsmall/[first line]/[last line]`

e.g. `/tft/printsmall/1/2 "Hello World! This is a longer test message to print on the screen"`

Print the string argument on the TFT screen starting at line 1 and ending on line 2. The TFT has 10 lines of small text.



PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

`/tft/printmessage/[top/bottom]`

e.g. `/tft/printmessage/top "Hello World!"`

Print the string argument on the TFT screen in the top/bottom half of the screen in large font, with a title of "Incoming OSC Message" in small font.

`/refresh`

e.g. `/refresh`

When in QLab or QLab (Advanced) mode, OSCA Remote Control-8 will send an OSC message to QLab to get the current playhead position and update the TFT screen with that cue name

`/reload`

e.g. `/reload`

When in QLab or QLab (Advanced) mode with playhead override off, OSCA Remote Control-8 will send a message to QLab to set the playhead position to match the cue shown on the TFT.

`/redirect`

e.g. `/redirect/input/5/message/3 2`

Change the destination that the specified message is sent to. This change will persist until the device is rebooted and is not stored in the configuration file.

`/saveconfig`

e.g. `/saveconfig`

This will save the current config to the internal config file.

Please note saves can take a second or two and OSCA Remote Control-8 will not respond to button pushes made during a save or load operation

`/loadconfig`


e.g. `/loadconfig`

This will load the internal config file, and can be used to revert temporary changes made by sending in `/redirect` messages

Please note saves can take a second or two and OSCA Remote Control-8 will not respond to button pushes made during a save or load operation

`/reply`

This is used to handle messages received from QLab and update the TFT when in QLab or QLab (Advanced) mode and is not intended to be used in other situations



PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS


Additional Information

Power


OSCA can be powered by POE or 5v DC via the USB C port

Factory Reset

Hold the reset button at power on for 3 seconds to enter factory reset mode. Press button 1-3 corresponding to the desired option. These options are also offered if OSCA Remote Control-8 is booted without a network connection, or fails to obtain an IP address lease when DHCP is on.

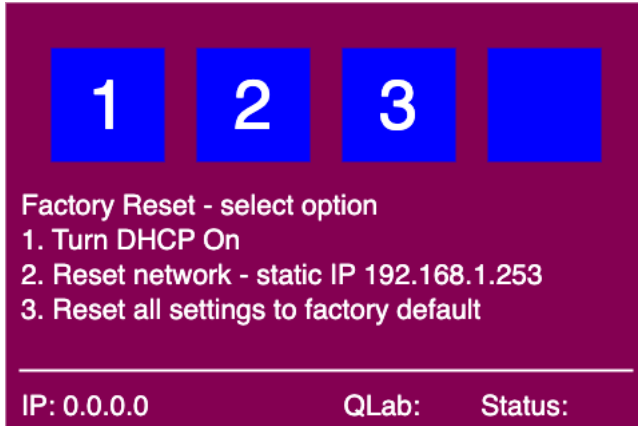

Version	By	Date	Firmware
1.0	BA	Nov 25	0.0.9.10
1.1	BA	Feb 26	0.0.10.3



PERFORMANCE INSURANCE

PRODUCTION TOOLS • SHOW CONTROL • BACKUP SOLUTIONS

EU declaration of conformity (CE symbol)

This declaration applies to
- OSCA REMOTE CONTROL-8 XX:XX:XX:XX:XX:XX
manufactured by Nemesis Research



All products of type OSCA Remote Control-8 are included, provided they correspond to the original technical version and have not been subject to any later design or electromechanical modifications.

We herewith declare that said products are in conformity with the provisions of the respective EC directives including all applicable amendments.

A detailed declaration is available on request and can be ordered from Nemesis Audio.

WEEE Declaration (Disposal)

Electrical and electronic equipment must be disposed of separately from normal waste at the end of its operational lifetime.

Please dispose of this product according to the respective national regulations or contractual agreements. If there are any further questions concerning the disposal of this product please contact Nemesis Audio.

Nemesis Research
57 Acre Lane
London
SW2 5TN
United Kingdom

info@nemesis-research.com

- END OF DOCUMENT -